

BOTTOM-MOUNT REACH-IN REFRIGERATORS & FREEZERS



PCR1



PCR2

Model	Doors	Capacity (Cu. ft)
PCR1	1	23
PCR2	2	49

PCF1	1	23
PCF2	2	49

Standard Features

- Solid state thermostat with digital display
- Stainless steel front and sides
- Field reversible 1-door units
- 3 heavy duty baked epoxy racks
- Self closing doors remain open past 90°
- Non twist solid mullions on 2 door units
- Environmentally friendly HFC 134A and 404A
- EZ slide out condenser
- Full length integrated door handle
- Whisper quiet
- Solid construction
- Holds sheet pans front to back
- High efficiency polyurethane insulation
- Zero clearance sides and 1" back
- ES - Energy Star approval




CERTIFIED TO ANSI/NSF 7 STANDARDS

Items	Description	Items	Description
Front, top & sides	Stainless steel	Temperature control	Solid state thermostat/Digital display
Doors	Stainless steel / ABS liner	Approvals	UL-EPH
External back	Aluminum	Refrigerating system	Capillary tube
Cabinet interior	Powder coated aluminum	Refrigerant	(CR) R134a; (CF) R404a
Interior floor	Stainless steel	Temperature range	(CR) 34-38°F; (CF) -1° to -7°F
Insulation	Polyurethane (CFC free)	Evaporator	Powder coated aluminum/copper
Shelves	Heavy duty, PVC coating	Condensing unit	Bottom mounted

**Warranty, 2 year parts & labor
5 year compressor**

BOTTOM-MOUNT REACH-IN REFRIGERATORS & FREEZERS

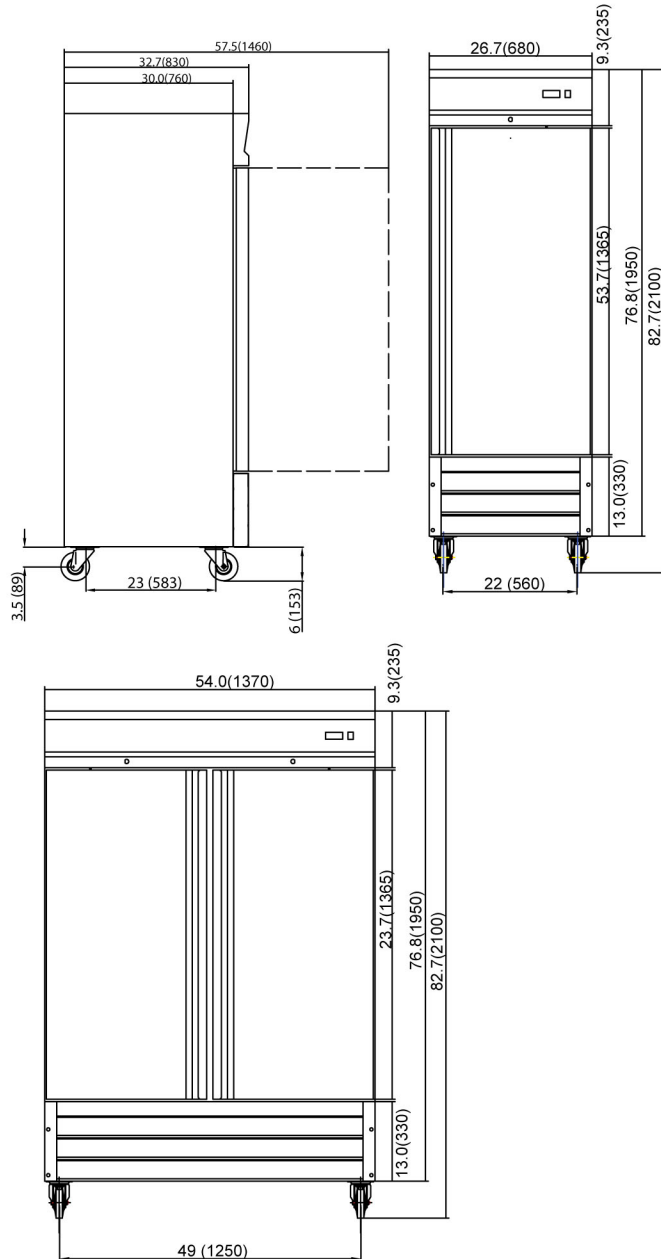

L14-20P

Y-X: 208V-230V/60Hz
W-Y: 115V/60Hz

Model	Doors	Storage CAP (Cu-ft)	Shelves	Cabinet Dim (inches)			HP	Voltage	Amps	NEMA Plug	Cord Lgth (ft)	Crated Weight (lbs)
				W	D	H						
PCR1	1	23	3	27	33.7	82.7	3/8	115/60/1	3.8	5-15 HP	10	350
PCR2	2	49	6	54	33.7	82.7	1/2	115/60/1	5.7	5-15 HP	10	518

PCF1	1	23	3	27	33.7	82.7	5/8	115/60/1	11	5-15 HP	10	364
PCF2	2	49	6	54	33.7	82.7	1	115/60/1	12	5-15 HP	10	568