

POT & PAN

Chemical Sanitizing Pot & Pan Single Rack Straight/Corner Dishwasher

FEATURES:

- 40 racks / 160 covers per hour. Models AH & C
- 80 racks / 320 covers per hour. Model SB
- All stainless steel construction assures long life and years of trouble free operation.
- Unique spray arm system features upper and lower stainless steel wash arms with reinforced end caps. Specially designed pull-pins allow wash arms to be easily removed for cleaning.
- Pump purging system improves results by eliminating soil and chemical carryover during rinse cycle.
- Top mounted controls include built-in chemical pumps and deliming system that assures proper chemical usage.
- Auto start/stop makes operation safe and
- Large 27" high door opening accommodates larger items and utensils.
- Integrated scrap tray prevents food soil from entering drain system.
- Stainless steel impeller offers extended life and service.
- Built-in strainer in water inlet to prevent water valve from clogging.

Available Options

- Solid/Powder Dual Bowl Dispenser
- CMA Temp-Sure[™] (Self contained 12kW heater)
- Sanitizer Alarm
- Stainless Steel Dishtables
- Alternative Cycle Times
- Alternative Electrical Available for Export
- Stainless Steel Scrap Trap Upgrade
- Slant Shelf 27"X42"
- Sheet Pan Dish Rack



AH Model





Optional Temp-Sure™ heater assures a continuous supply of 140°F hot water that guarantees

excellent results.












POT & PA

Chemical Sanitizing Pot & Pan Single Rack Dishwasher

WARNINGS:

- Plumbing connections must be made by a qualified service company who will comply with all available Federal, State, and Local Health, Plumbing and Safety codes.
- CMA recommends utilizing a water softening system to maintain water hardness measurements of 3.5 gpg (grains per gallon) or less. This will assure maximum results and optimum operation of the dishmachine.

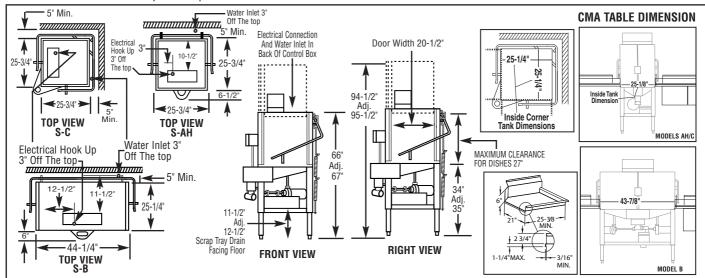

Specifications:					
MODEL S	USA	METRIC		USA	METRIC
OPERATING CAPACITY RACKS PER HOUR			WASH PUMP MOTORS HP	1	1
(NSF RATED)	40	40	DIMENSIONS		
OPERATING CYCLE			DEPTH	25-3/4" (AH/C)	(65.4cm)
WASH TIME-SEC	45	45	DEPTH	25-1/4" (B)	(64cm)
RINSE TIME-SEC	30	30	WIDTH (OUTSIDE DIMINSION		(65.4cm)
DWELL TIME-SEC	15	15	WIDTH (OUTSIDE DIMINSION		(112cm)
TOTAL CYCLE TIME	90	90	HEIGHT	66"-67"	(168-170cm)
WASH TANK CAPACITY	1.7 GAL. (AH/C) 3.0 GAL (B)	(6.43 L) (11.4 L)	STANDARD TABLE HEIGHT	34"	(86cm)
PUMP CAPACITY	68 GPM (AH/C) 136 GPM (B)	(257 LPM) (514.7 LPM)	MAXIMUM CLEARANCE FOR DISHES DRAIN CONNECTION	27"	(68.5cm)
OPERATING TEMPERATURE			(OFF FLOOR)	11-1/2" - 12-1/2"	(29.2cm - 31.7cm)
REQUIRED RECOMMENDED	120°F 140°F	(49°C) (60°C)	STANDARD DISHRACK	1	1
WATER CONSUMPTION		•	DIMENSIONS	19-3/4"X19-3/4"	(50X50cm)
PER RACK	1.7 GAL. (AH/C)	(6.43 L)	ELECTRICAL RATING	VOLTS	AMPS
PER RACK	3.0 GAL (B)	(11.3 L)		115 (AH/C)	16 (AH/C)
PER HOUR	74 GPH (AH/C)	(280 LPH)		115 (B)	30 (B)
PER HOUR	118.4 GPH (B)	(448 LPH)			
WATER REQUIREMENTS			APPROXIMATE SHIPPING WE	I GHT 299# A/C 397# B	(135.6kg)
WATER INLET	3/4"	(1.9cm)	SHIPPING DIMENSIONS	397# B PALLET & BOX @ 41" X 41" X 80" ((180.kg)
DRAIN-I.P.S.	2"	(5.1cm)		PALLET & BOX @ 51" X42" X 65" (
			1	I WELLI OF DOV 8 DI V45 V 00 (1	וט

Summary Specifications: Model S

Summary Specifications: Model S

CMA Energy Mizer model S low temperature, chemical sanitizing commercial dishwasher meets NSF and UL sanitation and construction standards WITHOUT the use of BOOSTER or TANK HEATERS. The model S is constructed entirely of stainless steel. Each unit automatically washes, rinses and sanitizes food service utensils in standard 19-3/4" x 19-3/4" racks and accommodates oversized plates and utensils with a 27" high door clearance. Unit comes standard with upper and lower stainless steel wash arms. The model S incorporates a pump purging system that improves results by eliminating soil and chemical carryover during rinse cycle. Note: This machine does not have built-in heaters, therefore produces no steam.

Available Models: S-AH Straight S-C Corner

Advisory: CMA does NOT endorse "Tankless On-Demand" water heaters for use on CMA Dishmachine products. CMA DOES endorse, and highly recommends, the standard "tank" style water heaters, sized properly to handle each particular facility with their water heating requirements.







CMA Dishmachines 12700 Knott Street Garden Grove, CA 92841 • 800-854-6417 • 714-898-8781 • Fax: 714-895-2141 • www.cmadishmachines.com

CMA reserves the right to modify specifications or discontinue models without prior notification.

PN: 10106.00 © 8-2018 CMA, Inc.

